


AMCO series

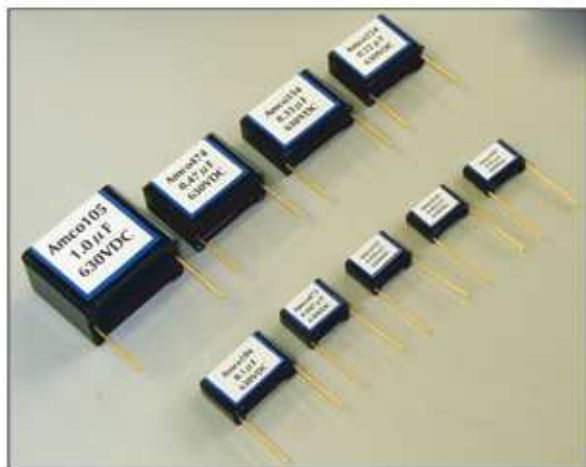

■ Features

- Metalized PET film capacitor with 630V rated voltage suitable for tube amplifiers
- GOLD plated Pb free OFC lead wire
- Special capacitor structure to reduce current distortion
- Meets RoHS requirements

■ Construction and Materials

Category temperature range	-40~100°C
Rated voltage	630V DC(2J)
Rated capacitance range(μF)	0.01/0.022/0.033/0.047/0.1/0.22/0.33/0.47/1
Rated capacitance tolerance	$\pm 20\%$ (M)
Dissipation factor	$< 0.01\%$ (20°C 1KHz)
Insulation resistance	$> 15,000\text{M}\Omega$ ($C > 0.33\mu\text{F}$) $> 5,000\Omega$ ($C > 0.47\mu\text{F}$)
Body	Epoxy resin (Black)

■ Syle

Type	Capacitor $\mu\text{F} \pm 10\%$	Dimension(mm)				
		W	H	T	F	d
Amco103	0.01	17.0	12.0	5.0	15.0	0.6
Amco223	0.022		12.5	5.5		
Amco333	0.033		13.0	6.5		
Amco473	0.047	25.0	16.0	10.0	22.5	0.8
Amco104	0.1		19.5			
Amco224	0.22	30.0	22.0	11.0	27.5	0.8
Amco334	0.33		24.5			
Amco474	0.47	36.0	30.5	20.0	32.5	0.8
Amco105	1.0		24.5			

