



H-20-3.5U

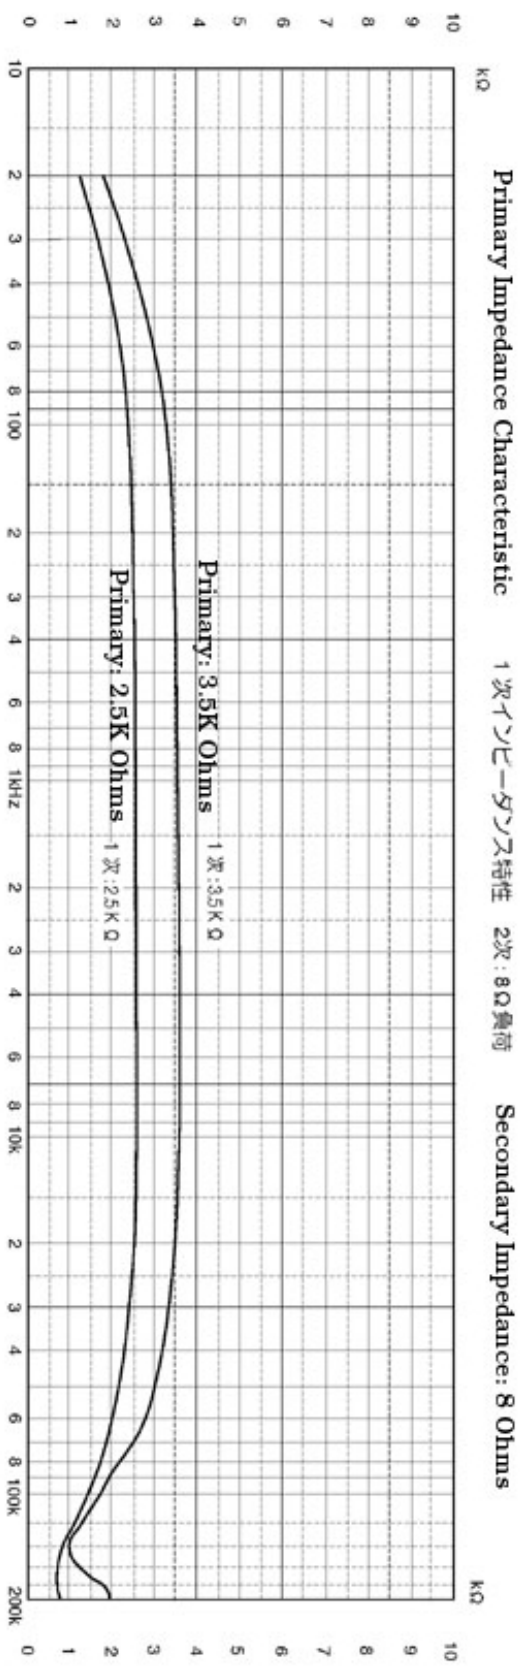

1. 定格出力20W(50Hz) **Rated Output 20W (50Hz)**
2. 1次インダクタンス 13H/100mA(2.5KΩ) **Primary Inductance / DC Current: 13H/100mA (2.5K Ohms)**
/ 巻線電流(標準値) 18H/ 80mA(3.5KΩ) **18H/80mA (3.5K Ohms)**
3. 1次許容DC電流 140mA **Primary Max. DC Current: 140mA**
4. 1次巻線抵抗 99Ω **Primary Resistance: 99 Ohms**

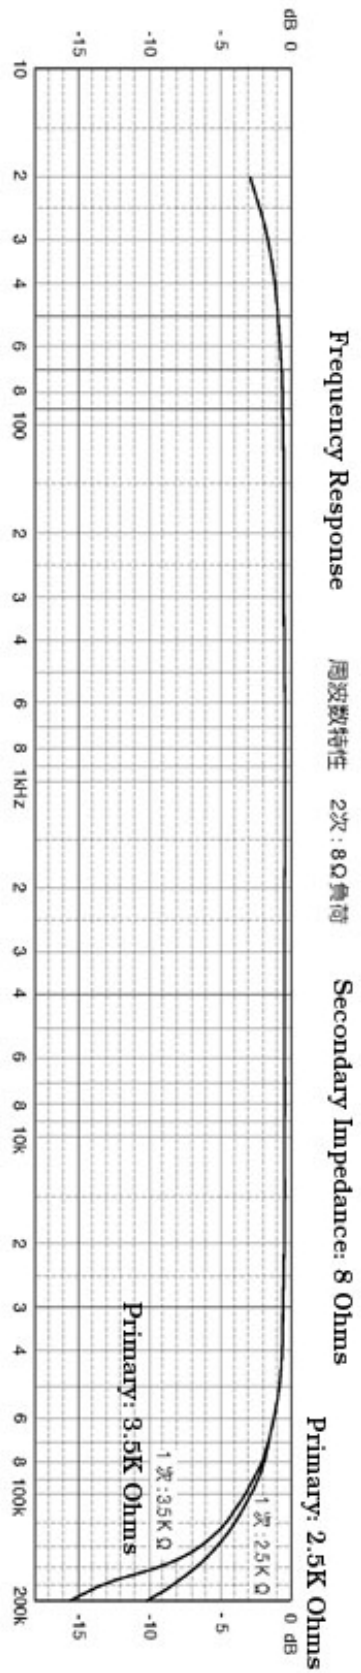

橋本電気株式会社

〒124-0012 東京都板橋区立白2-17-11
Tel:03-3601-4173 (代) Fax:03-3601-0410