
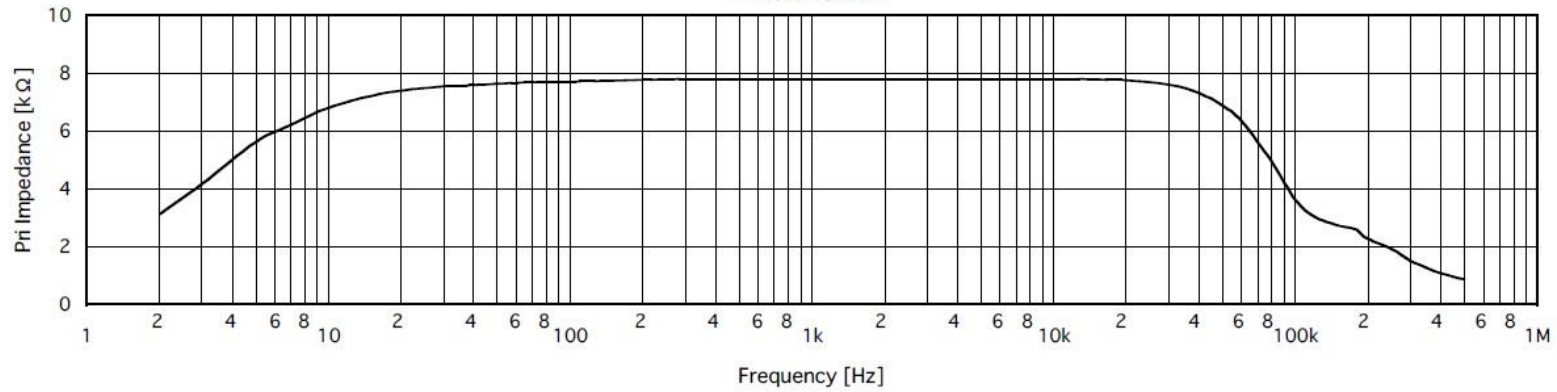



FC-40-8

ISO™

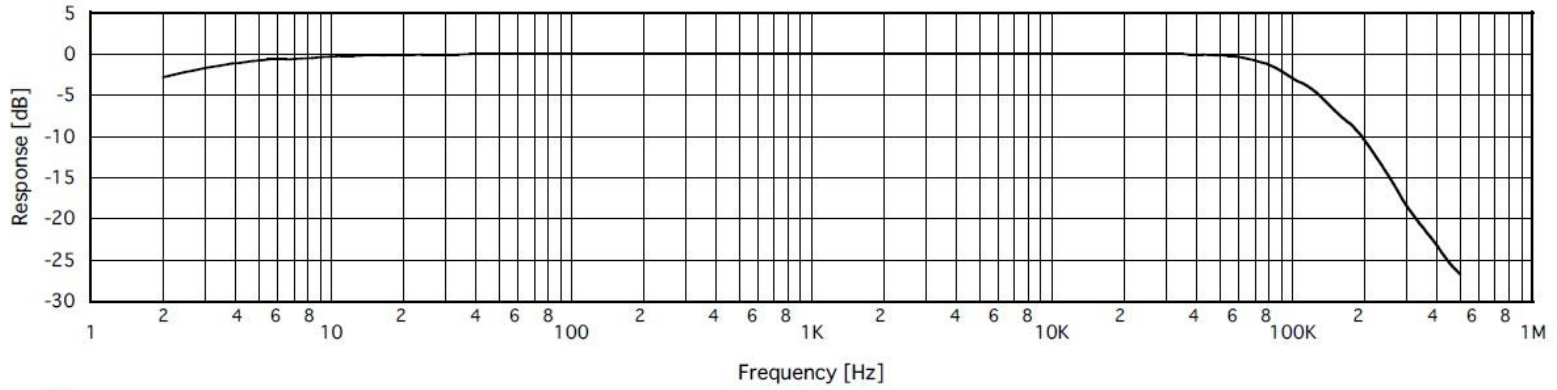

- ⊙ Power 40W/45Hz
- ⊙ Response 5Hz~60kHz(-1dB、Level4V、 $2r_p=Z_p$)
- ⊙ Pri. Inductance at 1mW 150H、Max 500H ∼ 50Hz
- ⊙ Pri. Max DC Current For two tubes 200mA、Unbalance 5mA
- ⊙ Efficiency(16Ω) 0.24dB
- ⊙ Pri. Resistance 200Ω(P1-P2)

Terminal Connection



Outline Drawing

